

1. Introduzione

A richiesta, i compressori serie D, F, S, V, Z e W (vedi pagina 2) vengono forniti completi di n°4 supporti antivibranti a molla (vedi fig.1) ciascuno composto da:

- 1 dado
- 2 tirante
- 3 dado flangiato
- 4 distanziale
- 5 molla
- 6 gommino
- 7 rondella
- 8 dado autobloccante

2. Montaggio

Per fissare il supporto antivibrante al basamento, fare riferimento alla sequenza illustrata nella fig. 2, facendo bene attenzione a serrare correttamente i dadi 1 e 3 (coppia di serraggio 35 Nm) e a rispettare la posizione di montaggio delle molle come indicato a pagina 2.

Per evitare che durante il trasporto della apparecchiatura frigorifera completa, le sollecitazioni danneggino sia il basamento che le tubazioni collegate al compressore, si raccomanda di avvitare il dado superiore 8 fino a fare entrare in contatto il piede del compressore e il distanziale 4 (vedi figura 3). Una volta terminato il trasporto, svitare il dado superiore 8 fino a quando la rondella 7 si muove liberamente.

1. General

On request, compressors series D, F, S, V, Z and W (see page 2) can be supplied with a kit of 4 spring vibration absorbers (see fig.1) each one including:

- 1 nut
- 2 rod
- 3 flange nut
- 4 spacer
- 5 spring
- 6 grommet
- 7 washer
- 8 self-locking nut

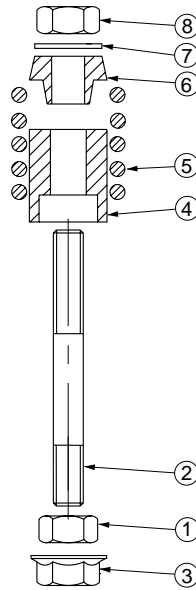


fig. 1

2. Mounting

Mounting of the vibration absorbers must be performed following the sequence shown in fig.2; a correct tightening torque (35 Nm) must be applied to the nuts 1 and 3 and springs have to be mounted in accordance with the informations of page 2.

To avoid damage to the frame and to the piping of the complete cooling system during the transportation, be sure to screw the nut 8 until the compressor feet make contact with the spacer (see fig.3)

As soon as the transportation has been concluded, unscrew nut 8 until the washer 7 is moving freely.


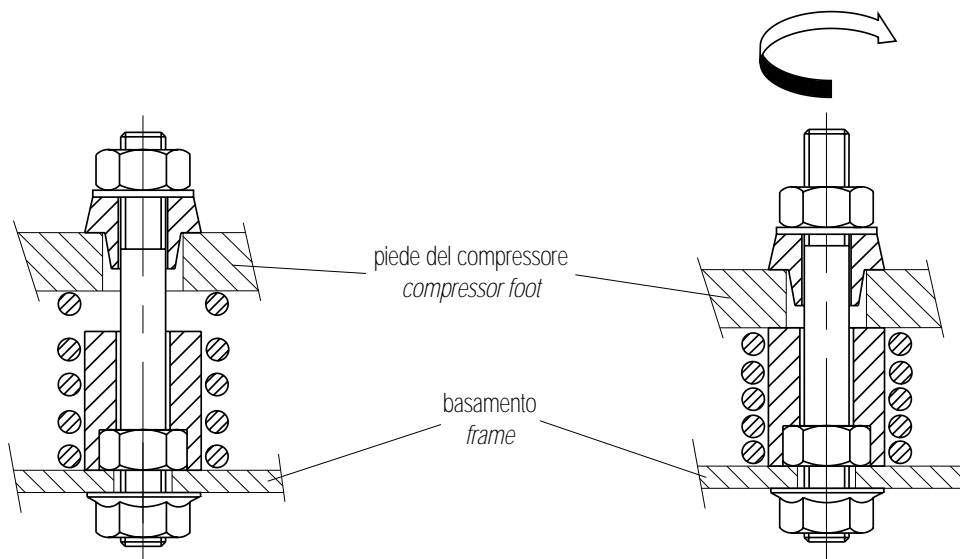


fig. 2
posizione di funzionamento
service

fig. 3
posizione di trasporto
transport

3. Modelli e posizioni per il montaggio - Model and mounting locations

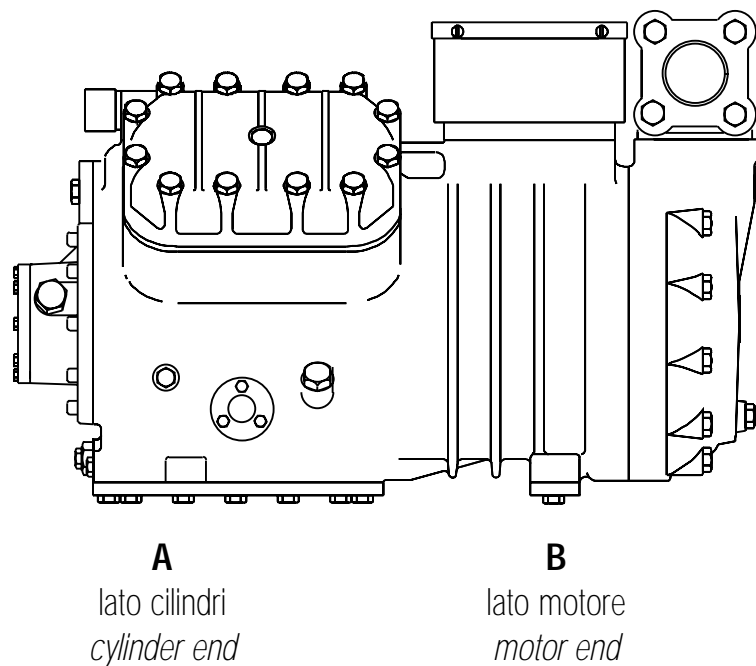

Serie compressore <i>Compressor series</i>	Supporti antivibranti <i>Vibration absorbers</i>			
	A lato cilindri <i>cylinder end</i>		B lato motore <i>motor end</i>	
	colore <i>colour</i>	codice <i>code</i>	colore <i>colour</i>	codice <i>code</i>
D	blu / <i>blue</i>	T00SK205300	verde / <i>green</i>	T00SK205350
F	verde / <i>green</i>	T00SK205350	rosso / <i>red</i>	T00SK205450
S	nero / <i>black</i>	T00SK205500	marrone / <i>brown</i>	T00SK205550
V				
V 15 59 - V 15 71 V 20 84 - V 20 59	grigio / <i>gray</i>	T00SK205600	giallo / <i>yellow</i>	T00SK205650
V 25 71 - V 30 84 - V 25 93 V 32 93 - V 25 103 - V 35 103	grigio / <i>gray</i>	T00SK205600	bianco / <i>white</i>	T00SK205655
Z	bianco / <i>white</i>	T00SK205655	azzurro / <i>light blue</i>	T00SK205750
W	bianco / <i>white</i>	T00SK205655	azzurro / <i>light blue</i>	T00SK205750